




2905 LaVanture Place - Elkhart, Indiana 46514 - Phone (574) 262-1258 - Fax (574) 264-9138

BY AMERICAN TECHNOLOGY COMPONENTS

AS-1000RAJ1R-M Parts/Service Replacement for AS-1000RAJ1R

To Install: The water resistant receiver box should be located in an accessible area. Side storage trunks or locations within cabinetry will work well. All electrical connections that are made to the receiver box should be made with properly sized connectors. All wiring should be routed in areas that will protect it from road hazards, sharp edges, and heat that may be generated by the engine or exhaust system. The system should be installed so that the electrical connections are protected from objects that may come in contact with them causing an electrical short

*** Shut-down and disconnect the battery during the installation**

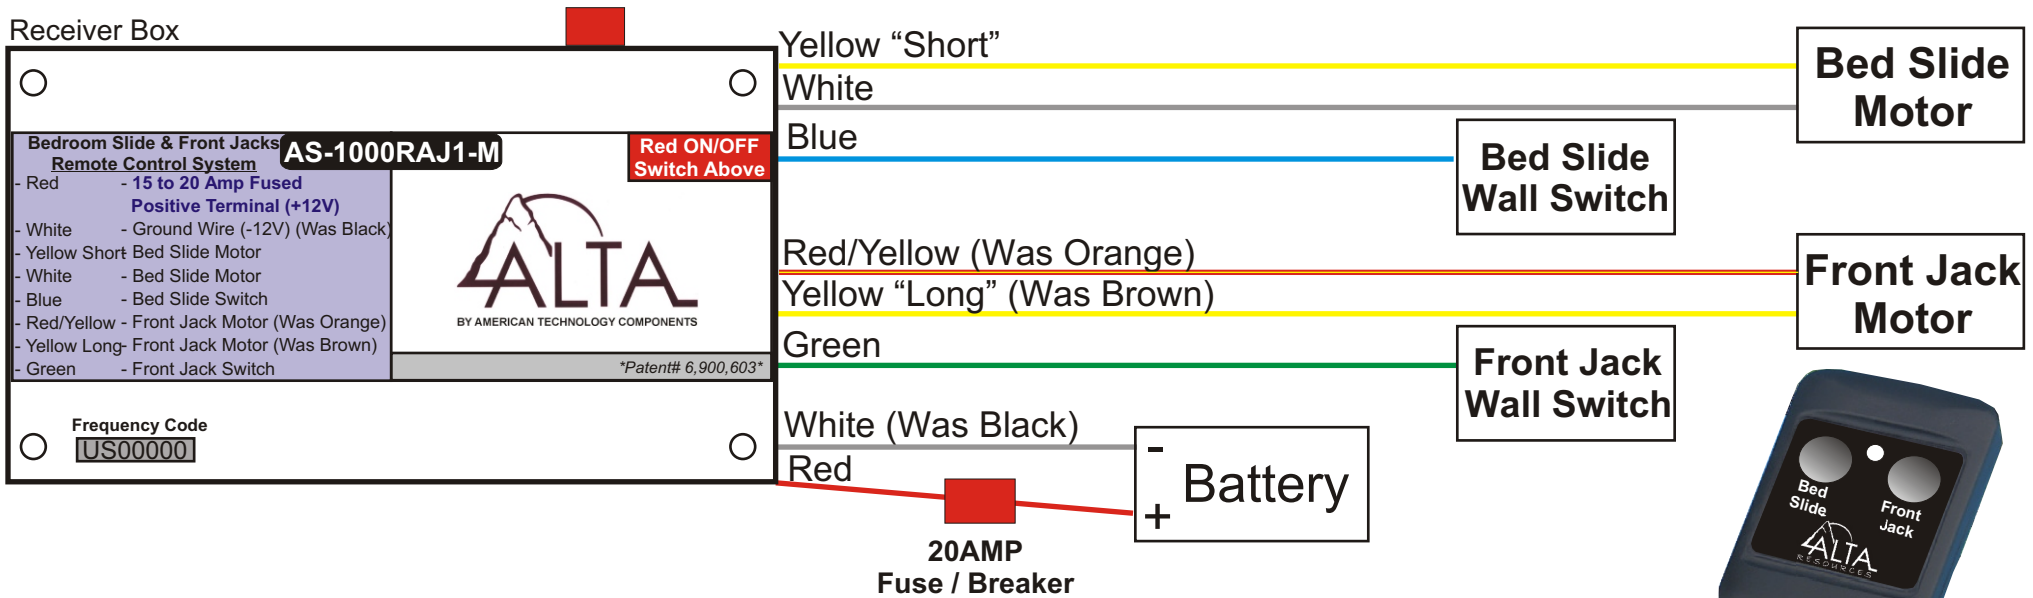

Read Before Operating:

- A) Reconnect the battery,
- B) Turn the red on/off switch, located on the receiver box, to the on position,
- C) Each button on the key fob controls one specific application.
- D) Depress and hold button 1 to activate the Bedroom Slide-Out motor.
 - Then by releasing button one and then depressing the same button again, the motor will stop and move in the opposite direction, as long as the button remains depressed.
 - The motor may also be controlled in the same manner as the key fob by the switches located on the wall.
 - Care should be taken to not overdrive the application. When the application reaches the end of travel, **release the button/switch**.
- E) Depress and hold button 2 to operate the Front Landing Legs.
- F) When the system is not in use, the on/off switch should be placed in the **off position**. This will deactivate the key fob only. You can still use the switches on the wall.